

Fig. 3

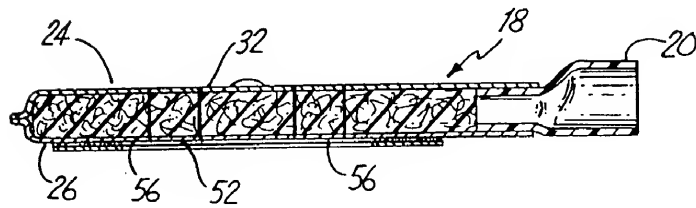
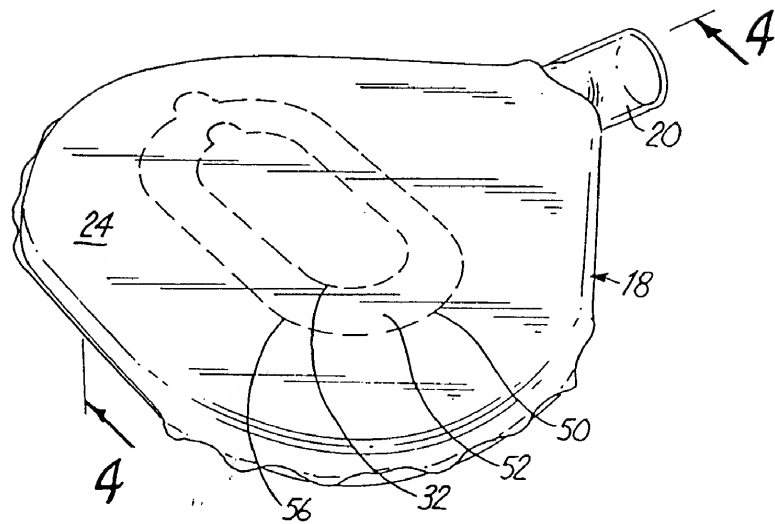
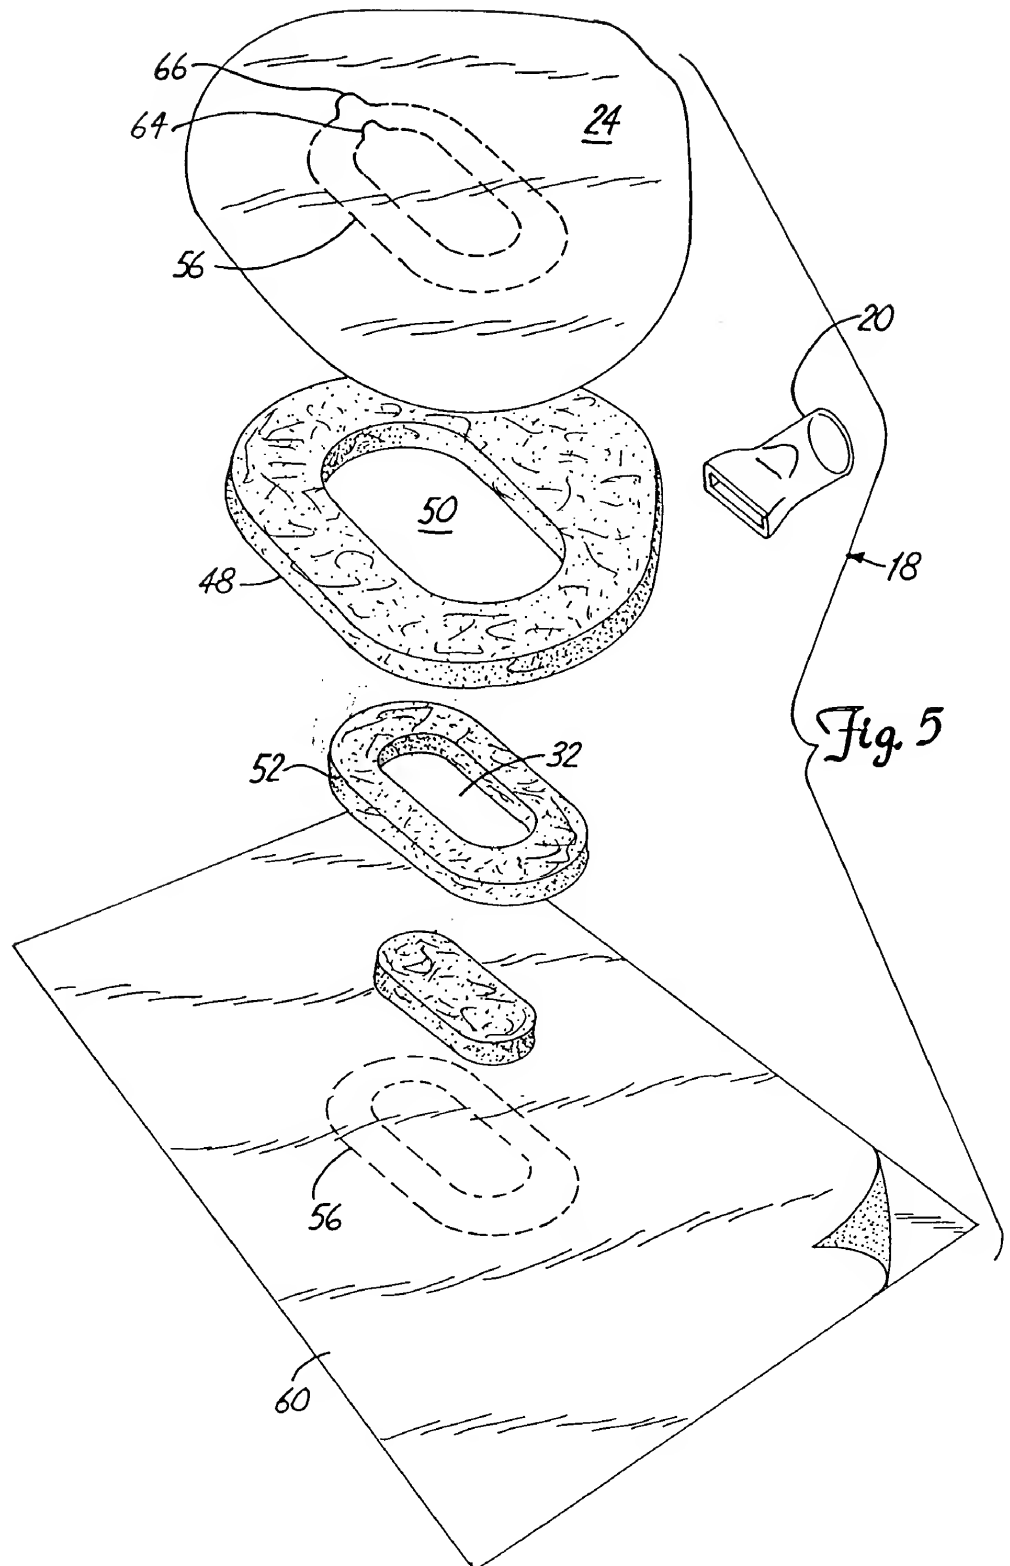
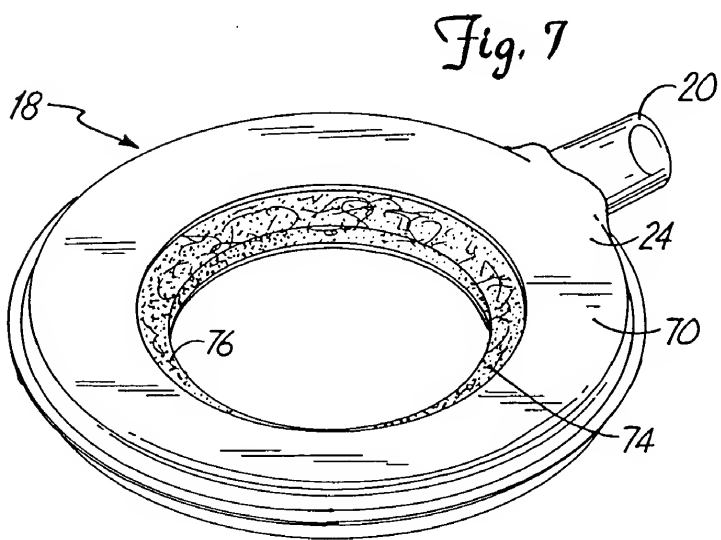
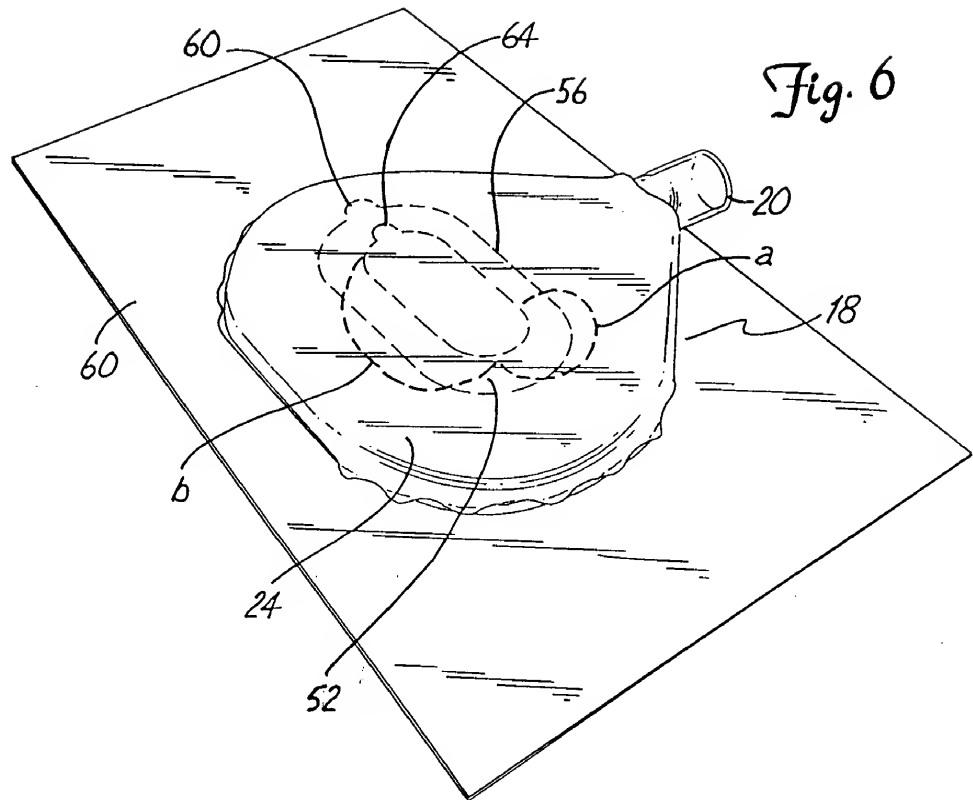
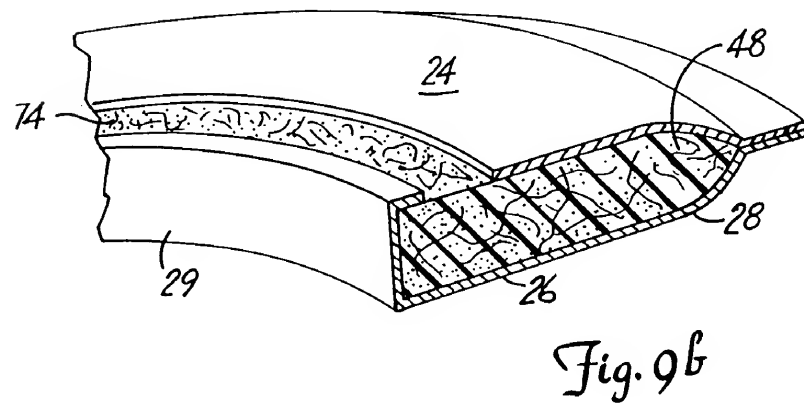
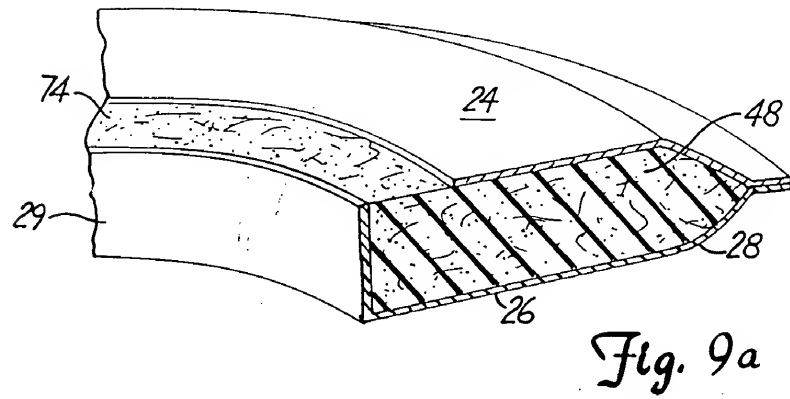
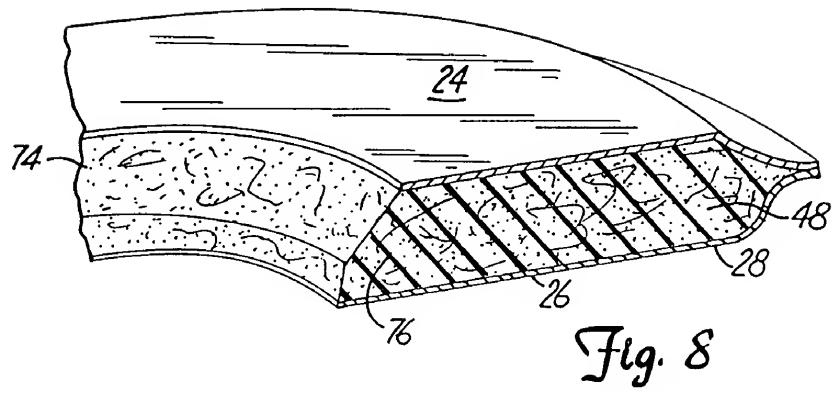


Fig. 4

3/10







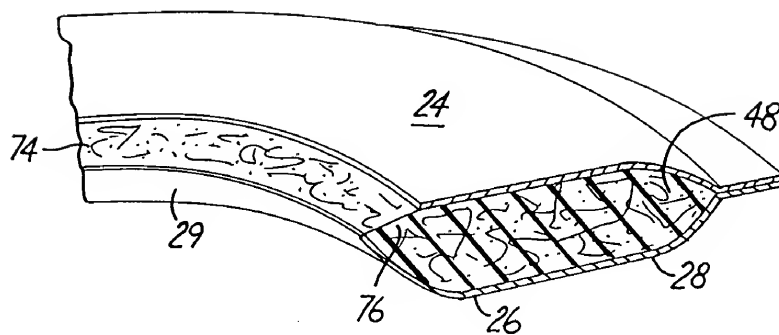


Fig. 10

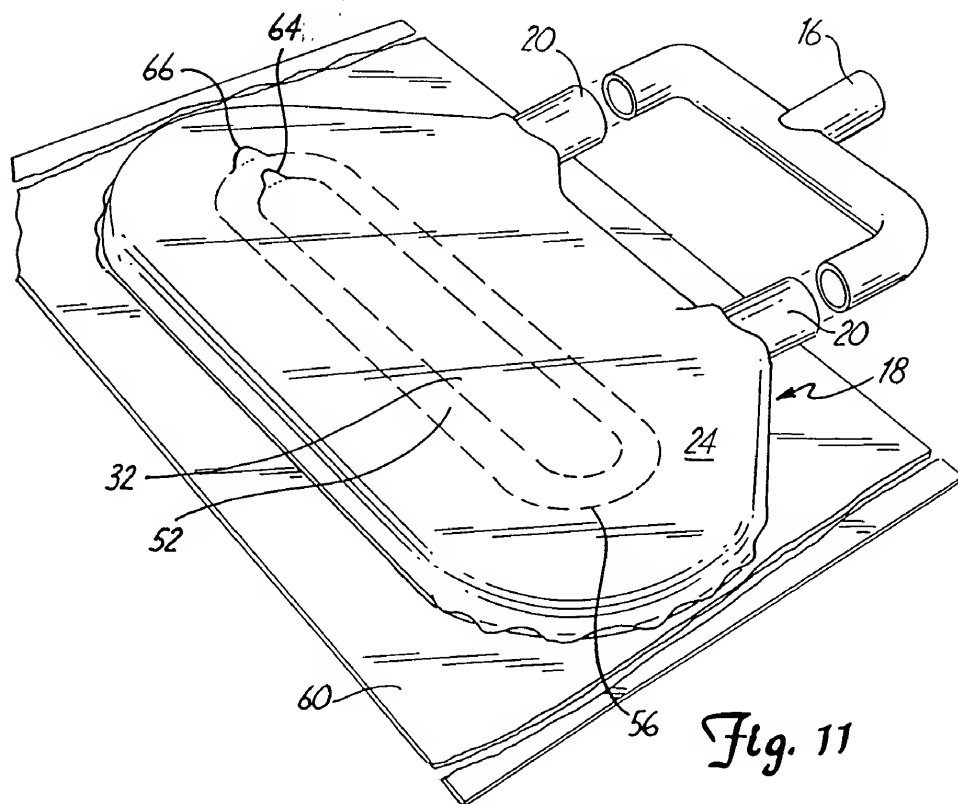
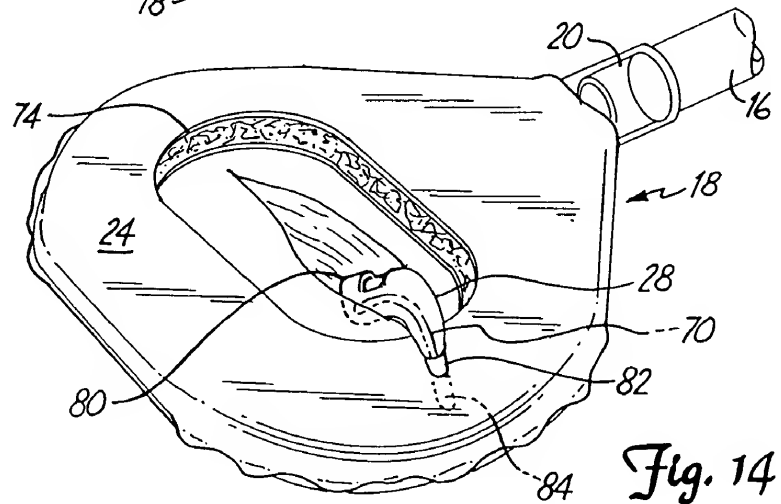
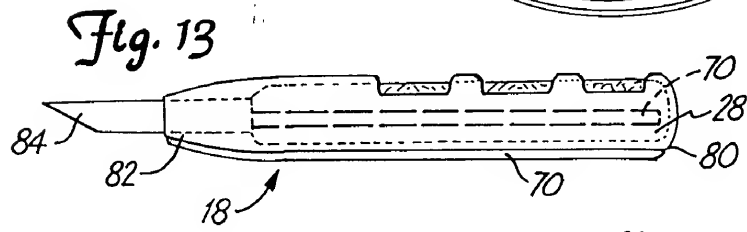
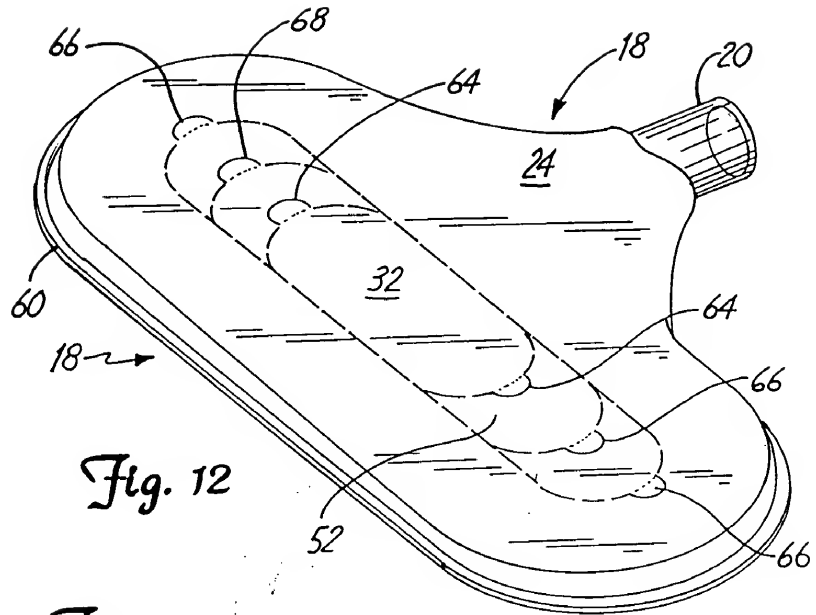


Fig. 11



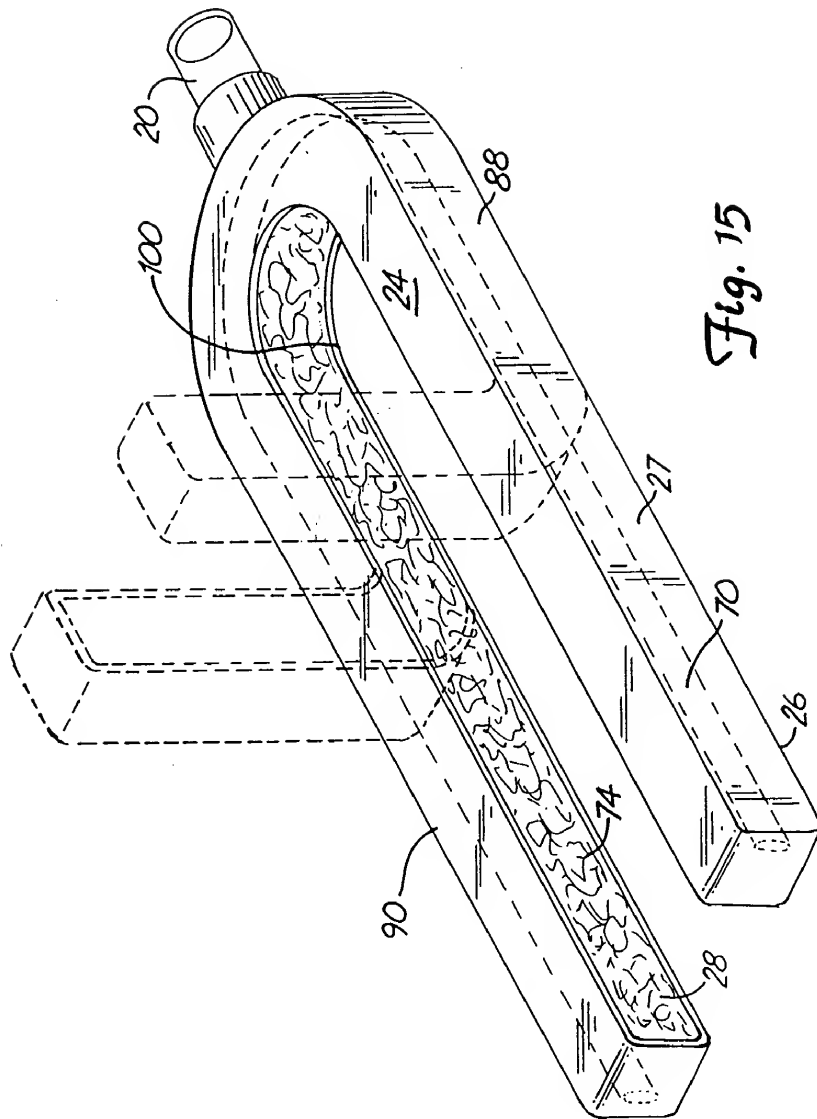
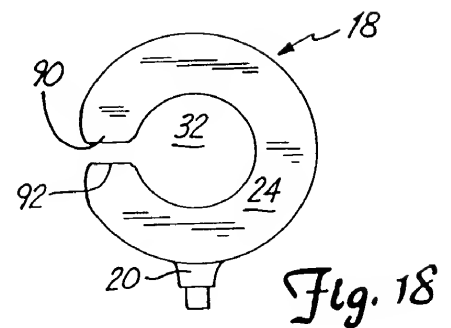
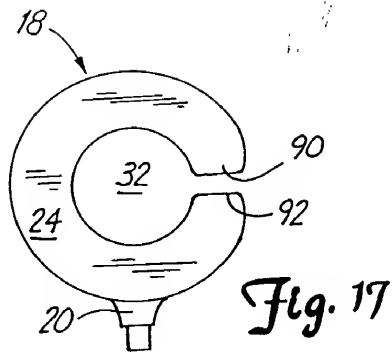
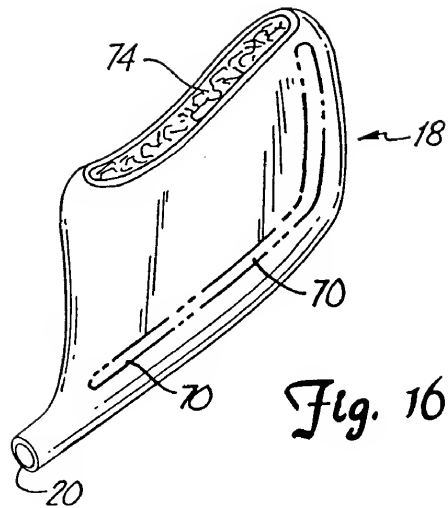


Fig. 15

FIG. 15 is a perspective view of the assembly shown in FIG. 14, with the U-shaped component (100) and the rectangular block (26) shown in a perspective view, with dashed lines indicating their internal structure and the position of the threaded rod (20) and nut (28).





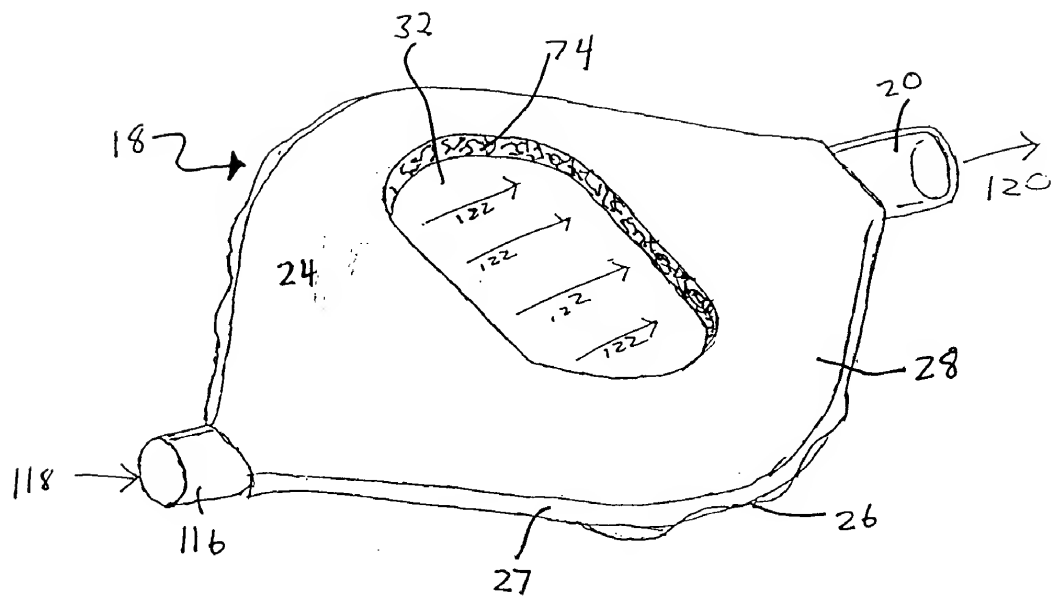


Fig. 19a

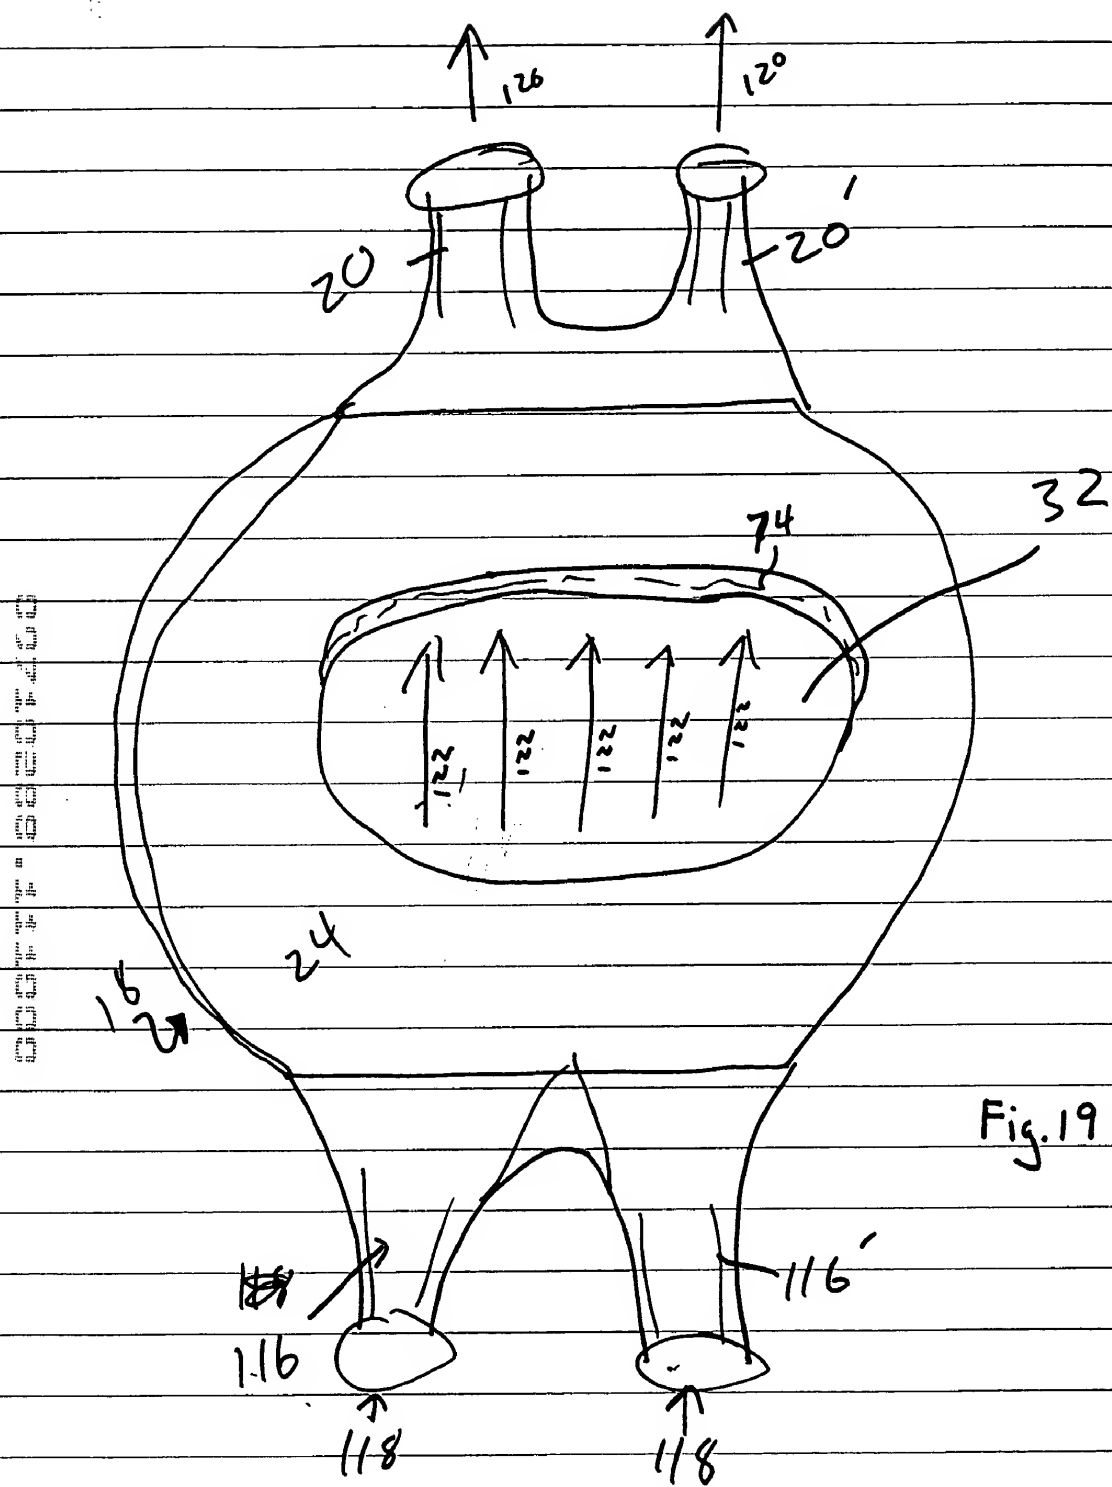


Fig. 19b



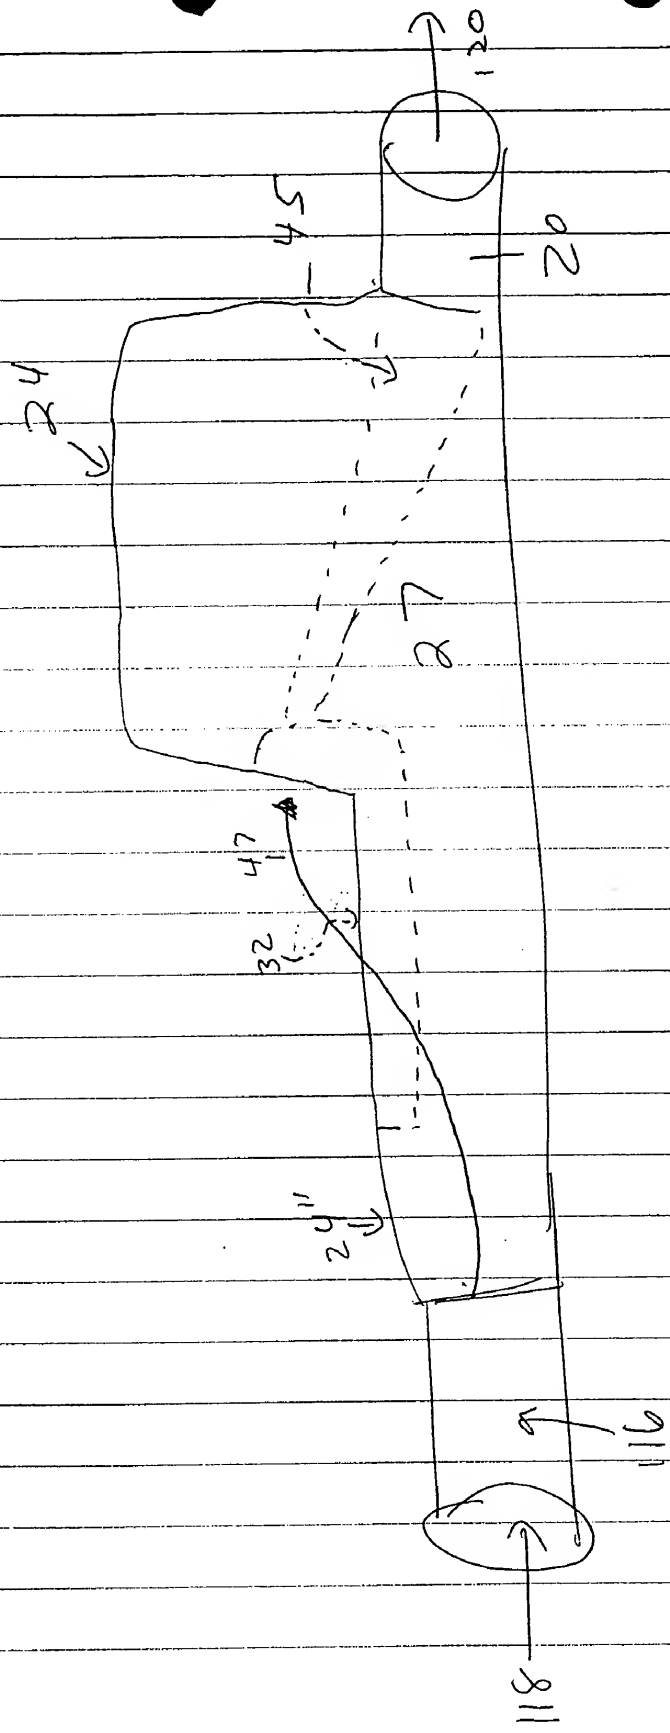


Fig 19C

Fig. 19d

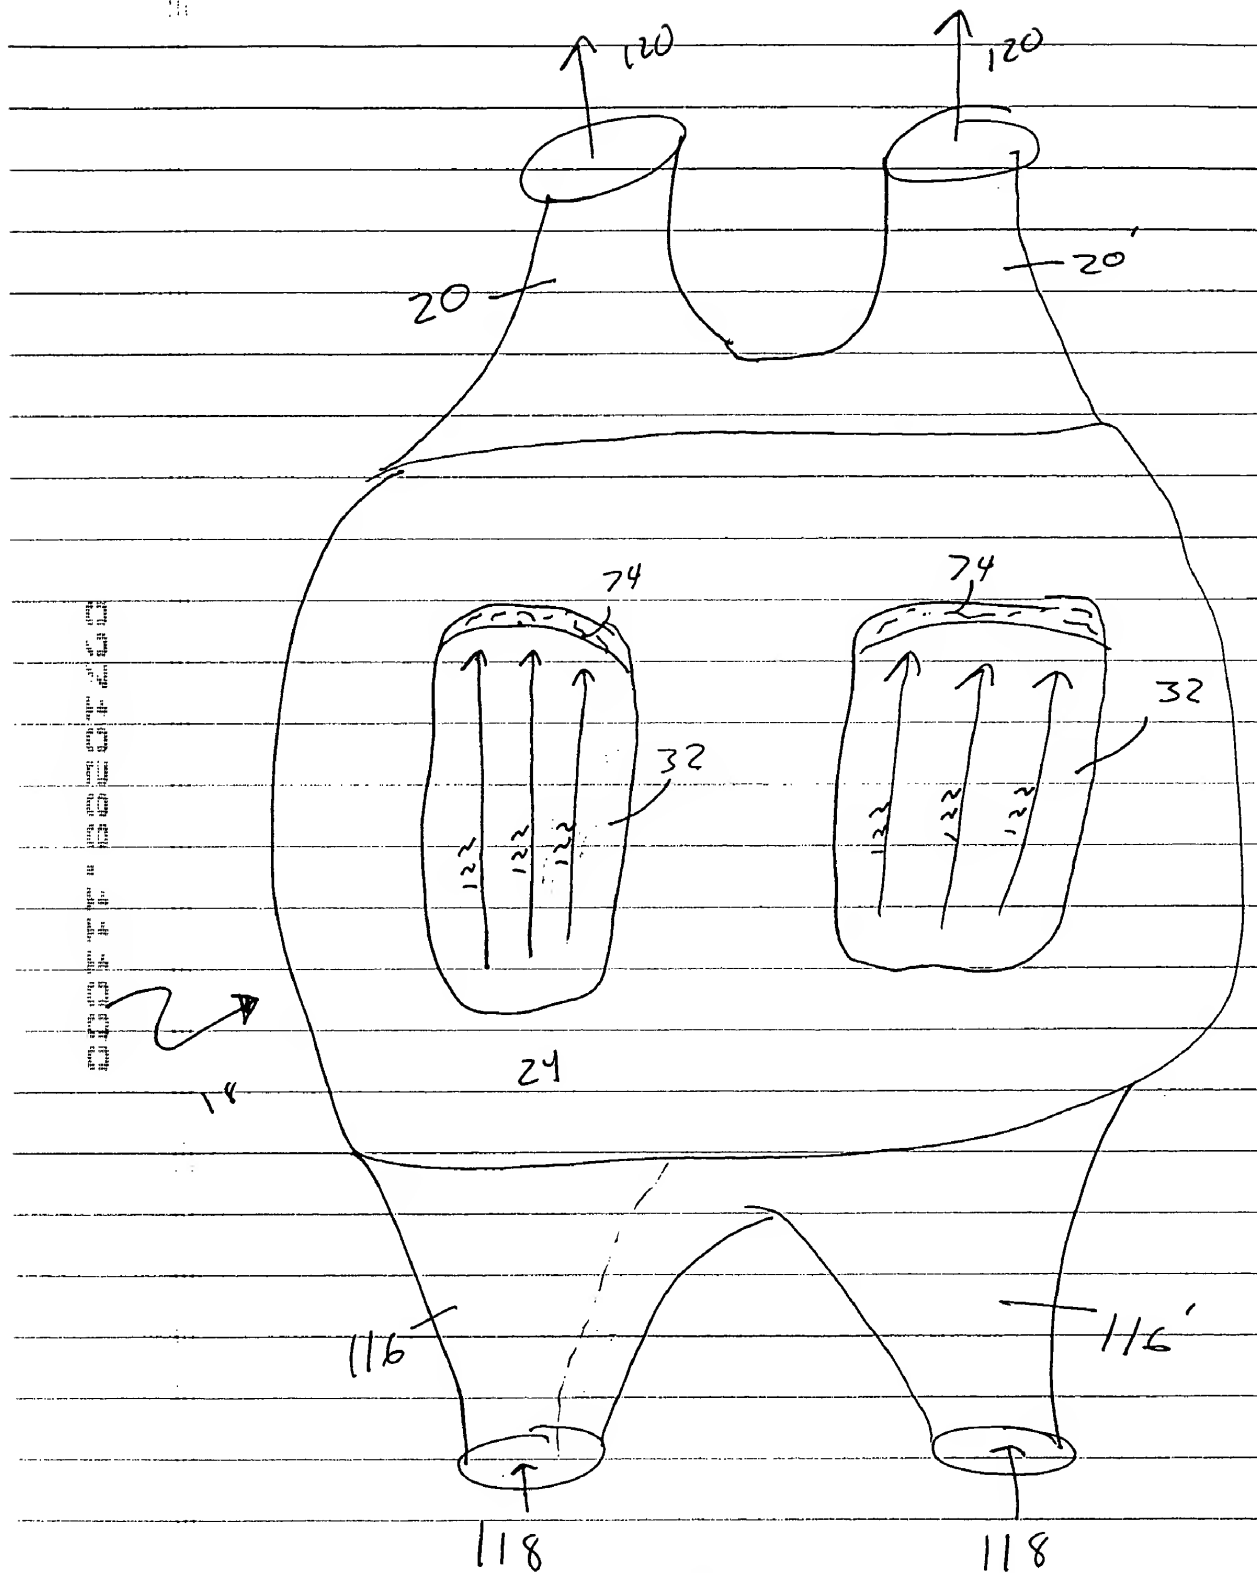

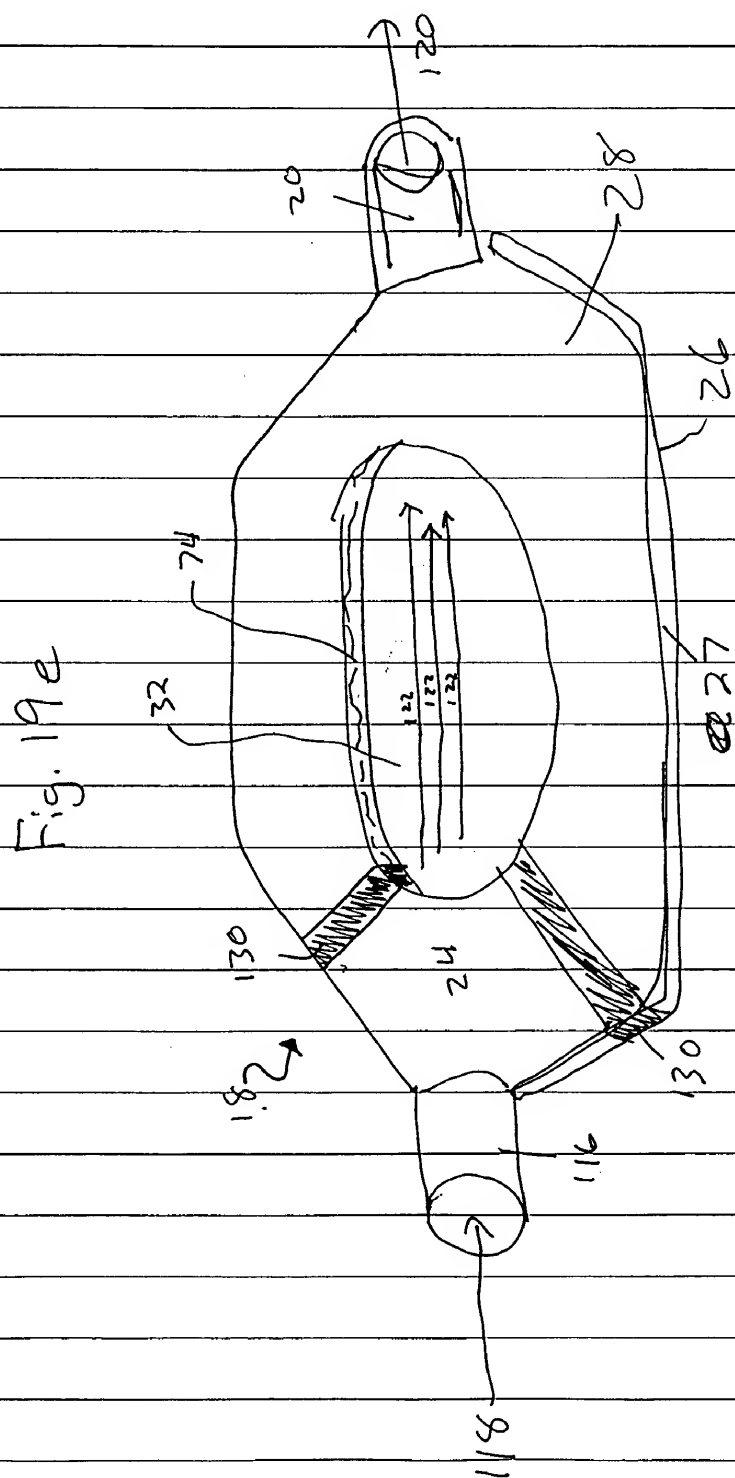

1905

Fig. 19F

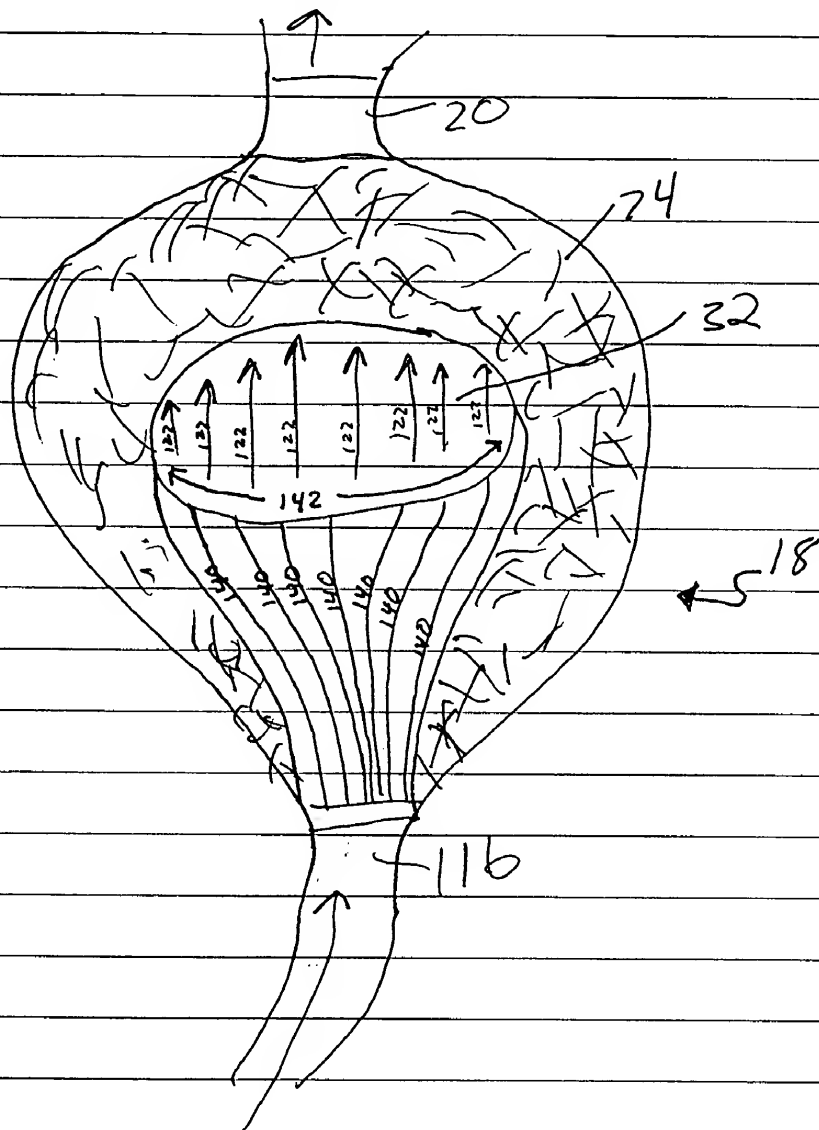


Fig. 19G

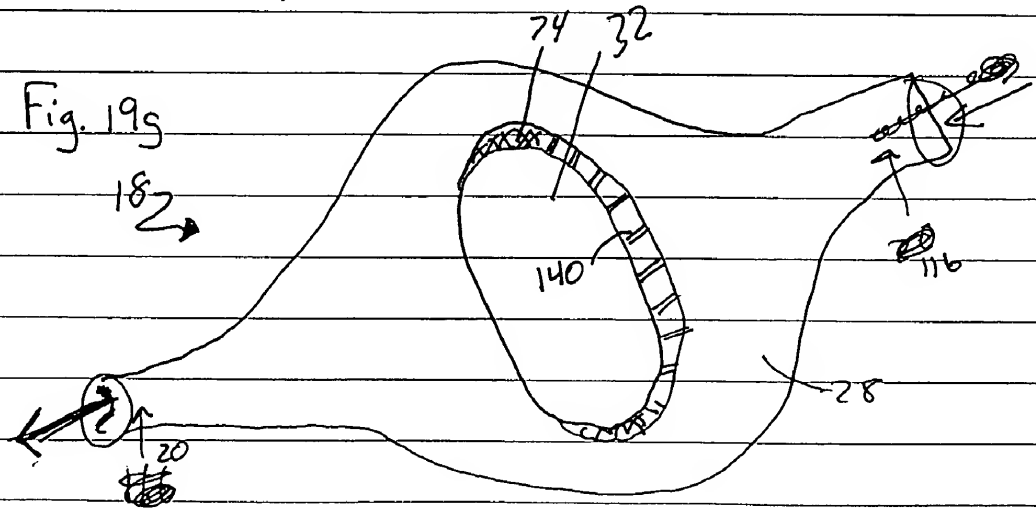


Fig. 20

